

StormPro™ Shutter with Glass
SEVERE WEATHER DOOR & FRAME WITH MULTI POINT LOCK

UL Certified to (FEMA) 320 & 361 Guidelines

DOOR: UP TO 4'-0" x 6'-8" LEAF SIZE, 16 GA. FACE SHEETS with 10 GA. LINER & POLYSTYRENE CORE.
LOCK: CORBIN RUSSWIN FE6700

HINGES: McKINNEY SP3786 or SP3386 (4-1/2" X 4-1/2" X .180")

OPTIONAL:

McKINNEY MCK-HG305 CONTINUOUS HINGES
MARKAR HG-305 CONTINUOUS HINGES

SHUTTER SIZES:


4-SIDED FRAME
1'-8" x 3'-0" MIN
4'-0" x 6'-8" MAX

THE CENTER BOLT & CENTERLINE OF STRIKE WILL BE LOCATED AT THE VERTICAL CENTER OF THE OPENING AS A STANDARD.

SHUTTERS WILL BE SUPPLIED WITH (2) HINGE PREPS IN HEIGHTS UP TO 4'0. HEIGHTS OF 4'0 AND GREATER WILL BE SUPPLIED WITH (3) HINGE PREPS.


GLAZING MATERIAL AND GLAZING ARE NOT PROVIDED UNLESS INCLUDED IN CONTRACT DOCUMENTS.

SHUTTER WITH GLASS

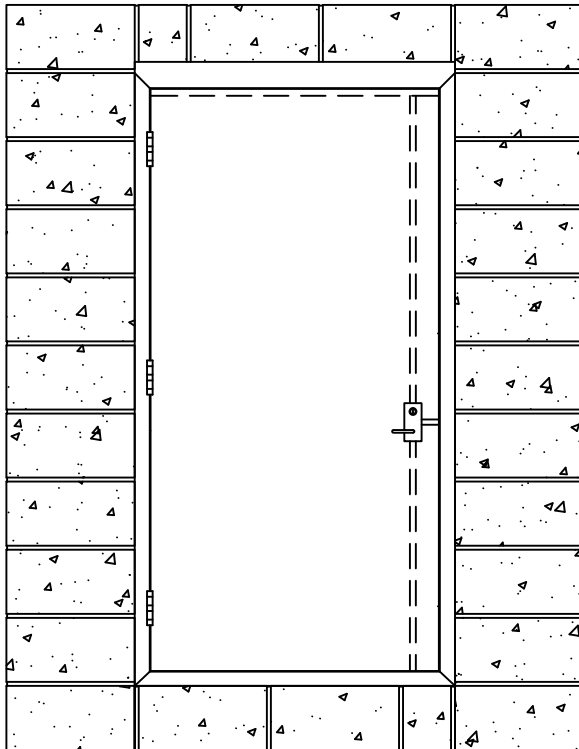


1/4" DOOR U.C. ONLY

VERTICAL SECTION




HORIZONTAL SECTION



INSWING ALWAYS


BEAD SET TO STOP-POCKET TO BE SET IN THE FIELD

HORIZONTAL SECTION

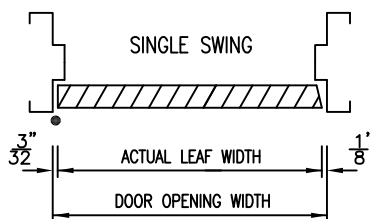

FRAME CONSTRUCTION/FEATURES

14 GAGE CRS or HOT-DIPPED A60 GALVANIZED STEEL

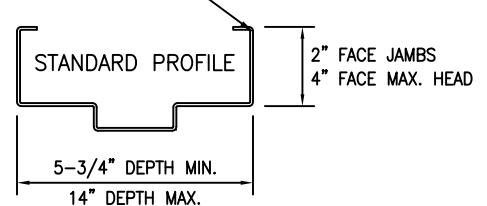

KD OR WELDED CORNERS

JAMB ANCHOR OPTIONS:

- MASONRY - "T" ANCHORS
- MASONRY - WIRE ANCHORS
- EXISTING OPENING ANCHORS W/ BOLTS
- 2-4 WALL ANCHORS PER JAMB: (DEPENDING ON OPENING HEIGHT)

HEAD and SILL ANCHORS:

- EXISTING OPENING DIMPLES W/ BOLTS
- 2-3 WALL ANCHORS PER HEAD: (DEPENDING ON OPENING WIDTH)
- 2-3 WALL ANCHORS PER SILL: (DEPENDING ON OPENING WIDTH)

Suggested Use:

- Disaster and Tornado Shelters*
- Storm Shelters*
- Community Shelters*
- School Shelters*
- School "Safe" Rooms*
- Residential "Safe" Rooms*

Designed to endure tornado force winds and flying debris. Developed to resist missile penetration for use in buildings designed as shelters to protect occupants from injury. Successfully tested in accordance with the guidelines set forth by the Federal Emergency Management Agency in the FEMA 320 & FEMA 361 publications.