



StormPro 320

SEVERE WEATHER DOOR & FRAME

DOOR: UP TO 3'-0" x 7'-0" LEAF SIZE, 14 GA. FACE SHEETS, 45H HINGES.
 LOCK: (1) SELF LATCHING SET, (3) MEDECO MAXUM DEADBOLTS

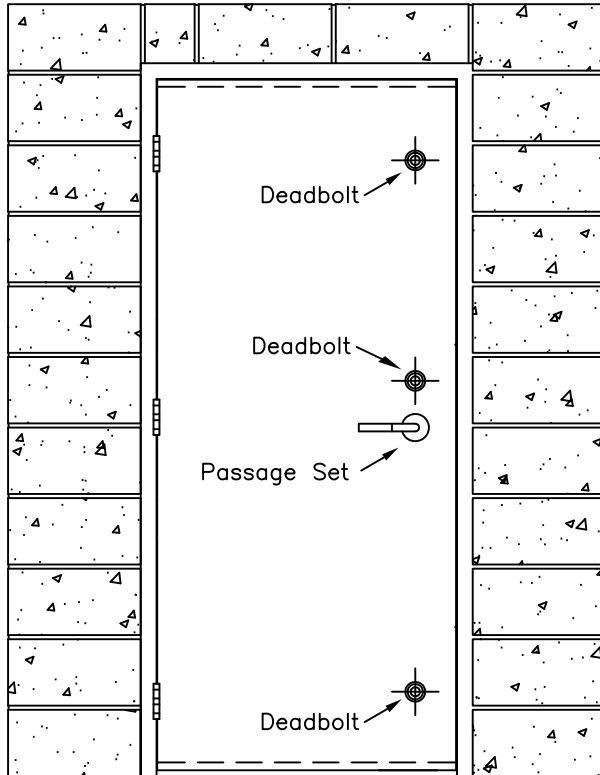

HORIZONTAL SECTION

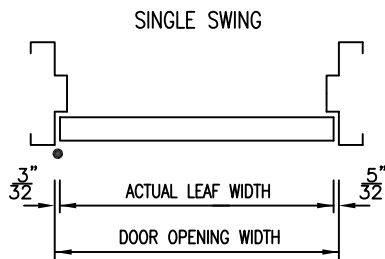

Suggested Use:

Residential "Safe" Rooms


Ceco's StormPro 320 was successfully tested at Texas Tech University's Wind Engineering Research Center, Lubbock, TX in accordance with the guidelines set forth by the Federal Emergency Management Agency in the publication FEMA 320 Taking Shelter From the Storm: Building a Safe Room in Your House.

DOOR CONSTRUCTION/FEATURES

14 GAGE (CR OR A60) FACE SHEETS
 12 GA TOP & BTM CHANNELS, EDGE SEAMS ARE FULLY WELDED, 12 GA FULL LENGTH VERTICAL STIFFENERS ALONG BOTH THE HINGE AND LOCK EDGES, 16 GA INTERMEDIATE STIFFENERS SPACED AT A MAXIMUM OF 6" APART. POLYSTYRENE FILLER USED BETWEEN THE STIFFENERS. SQUARE LOCK AND HINGE EDGES.

FRAME CONSTRUCTION/FEATURES

16 GAGE (CR OR A60) MINIMUM SU OR SQ
 434 DEPTH MIN. W/ 12 GA STRIKE REINFORCEMENTS
 HIGH FREQUENCY HINGE STRAPS.

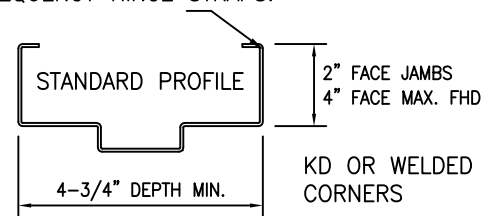

ANCHOR OPTIONS:

- MASONRY - "T" ANCHORS
- WOOD STUD ANCHORS
- EXISTING OPENING ANCHORS

5 WALL ANCHORS PER JAMB:

6" MAX FROM EACH END OF DOOR OPENING HEIGHT AND (4) EQUALLY SPACED

3 WALL ANCHORS PER HEAD:

ANCHOR SPACING:
 6" MAX FROM EACH END OF DOOR OPENING WIDTH AND MID-SPAN