

ASSA ABLOY

StormPro 361 SEVERE WEATHER DOOR & FRAME WITH MULTI POINT EXIT DEVICE


DOOR: UP TO 3'-0" x 7'-0" LEAF SIZE, 16 GA. (MIN) A60 GALV FACE SHEETS WITH HONEYCOMB OR POLYSTYRENE CORE. LOCK: SARGENT FM8700 VERTICAL ROD & HC980 MULLION ON PAIRS.

McKINNEY SP3786 (4-1/2" X 4-1/2" X .180")
 McKINNEY SP3386 (4-1/2" X 4-1/2" X .180")

OPTIONAL:

McKINNEY MCK-HG305 CONTINUOUS HINGES
 MARKAR HG-305 CONTINUOUS HINGES

OPTIONAL FIRE RATING: UP TO AND INCLUDING 3 HRS. IN ACCORDANCE WITH UL 10c FOR HONEYCOMB CORE DOORS ONLY.

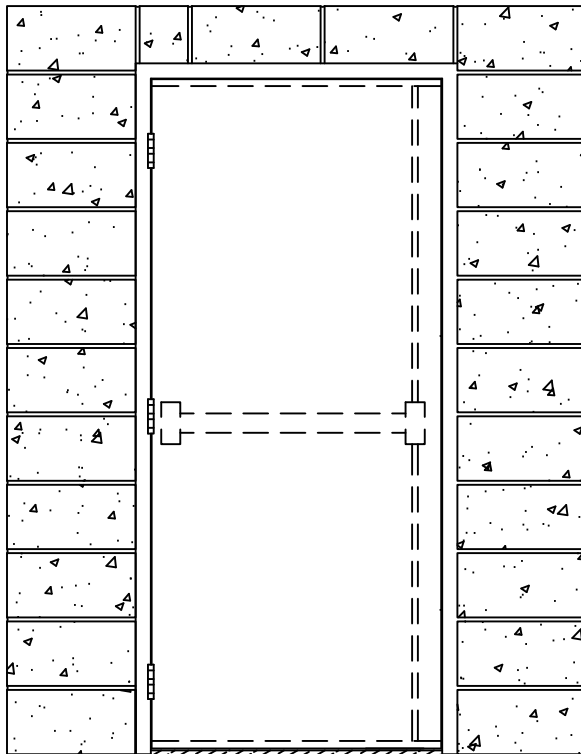


Designed to endure tornado force winds and flying debris. Developed to resist missile penetration for use in buildings designed as shelters to protect occupants from injury. Successfully tested in accordance with the guidelines set forth by the Federal Emergency Management Agency in the publication FEMA 361 Design and Construction Guidance for Community Shelters.

Suggested Use:

- Disaster and Tornado Shelters
- Storm Shelters
- Community Shelters
- School Shelters
- School "Safe" Rooms
- Residential "Safe" Rooms



FRAME CONSTRUCTION/FEATURES

16 GAGE HOT-DIPPED A60 GALVANIZED STEEL

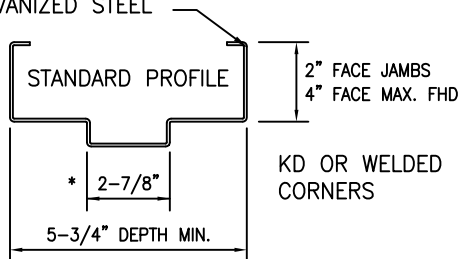

5/8" MAX. DOOR U.C.
 1/4" MAX. BOTTOM CLEARANCE W/THRESHOLD

HORIZONTAL SECTIONS

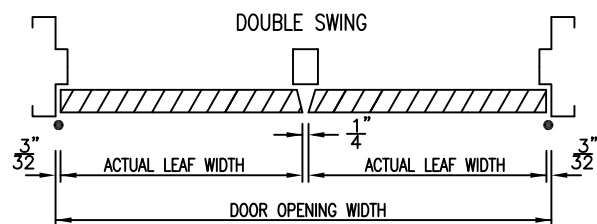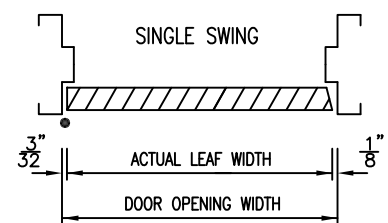

* MINIMUM SOFFIT DIMENSION FOR PAIRS ONLY REQUIRED TO MOUNT HC980 MULLION

JAMB ANCHOR OPTIONS:

- MASONRY - "T" ANCHORS
- MASONRY - WIRE ANCHORS
- EXISTING OPENING PREPS W/ BOLTS

5 WALL ANCHORS PER JAMB:

REQUIRED HEAD PREP

- 2 EO PREPS PER HEAD UP TO 3'0"
- 4 EO PREPS PER HEAD UP TO 6'0"
- BOLTS BY CECO

D17-1

11/10/08