

StormPro 320 & 361
SEVERE WEATHER DOOR & FRAME WITH MULTI POINT LOCK

UL Certified to (FEMA) 320 & 361 Guidelines

DOOR: UP TO 8'-0" x 8'-0" OPENING SIZE, 14 GA. A60 GALV FACE SHEETS WITH POLYURETHANE CORE.

LOCK: CORBIN RUSSWIN FE6800, SARGENT FM7100, OR YALE 7380F

INACTIVE DOOR: REINFORCED FOR CORBIN RUSSWIN 988CR, SARGENT 988, OR YALE 988Y

HINGES: 3 or 4 AS REQUIRED FOR DOOR HEIGHT.

McKINNEY SP3786 (4-1/2" X 4-1/2" X .180")


McKINNEY SP3386 (4-1/2" X 4-1/2" X .180")

OPTIONAL:

McKINNEY MCK-HG305 CONTINUOUS HINGES


MARKAR HG-305 CONTINUOUS HINGES

IF OVER 6'-0" x 7'-0" AND FIRE RATED, CORE WILL BE HONEYCOMB

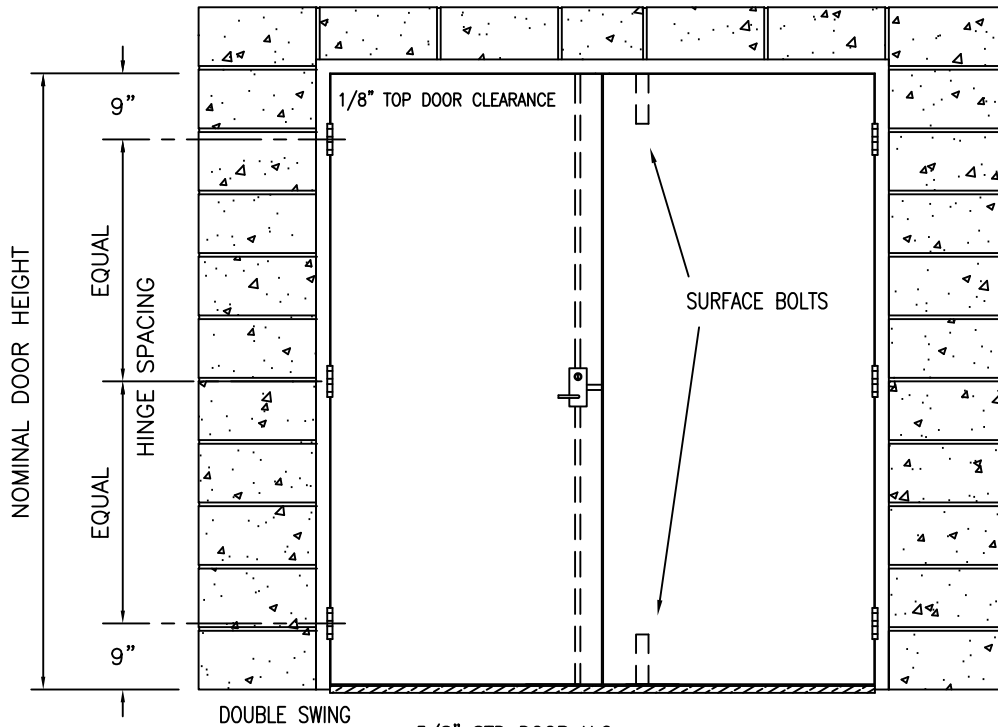


5/8" STD DOOR U.C.
1/4" MAX. BOTTOM
CLEARANCE TO TOP OF STRIKE

HORIZONTAL SECTION

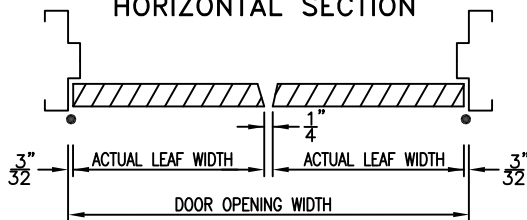

FRAME CONSTRUCTION/FEATURES

14 GAGE HOT-DIPPED
A60 GALVANIZED STEEL

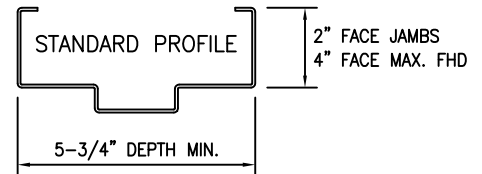

KD OR WELDED
CORNERS

JAMB ANCHOR OPTIONS:
MASONRY - "T" ANCHORS
MASONRY - WIRE ANCHORS
EXISTING OPENING PREPS W/ BOLTS

6 WALL ANCHORS PER JAMB:

REQUIRED HEAD PREP
4 EO PREPS PER HEAD UP TO 6'-0"
5 EO PREPS PER HEAD 6'-1" TO 8'-0"
BOLTS BY CECO

Suggested Use:

- Disaster and Tornado Shelters*
- Storm Shelters*
- Community Shelters*
- School Shelters*
- School "Safe" Rooms*
- Residential "Safe" Rooms*

Designed to endure tornado force winds and flying debris. Developed to resist missile penetration for use in buildings designed as shelters to protect occupants from injury. Successfully tested in accordance with the guidelines set forth by the Federal Emergency Management Agency in the FEMA 320 & FEMA 361 publications.

D17-3

03/06/09