


SERIES SQT AND SRT THERMAL BREAK FRAMES


FOR 1-3/4" THICK DOORS

STANDARD WALL APPLICATION, HANDED

DOUBLE RABBET

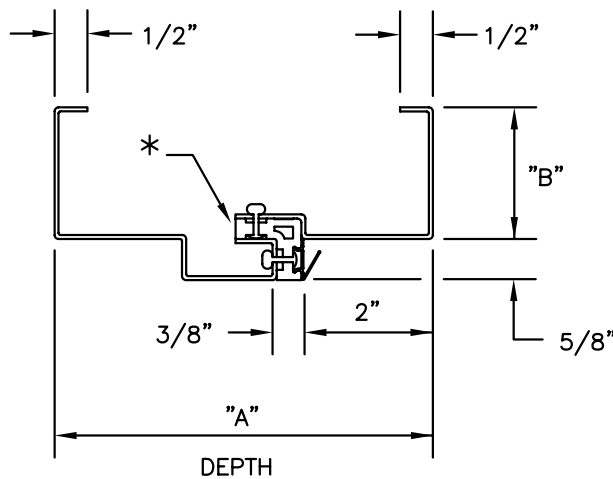

SINGLE RABBET

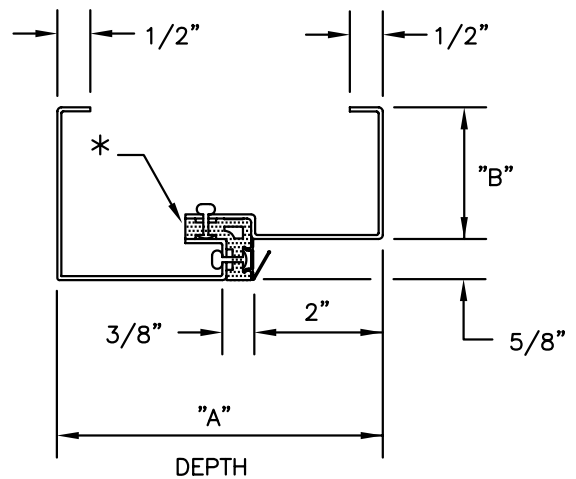


* 3/8" Thick vinyl thermal barrier with vinyl compression type gasket.

FACE	Dim B
HEAD	1" Thru 4"
JAMBS	1" Thru 4"

PROFILE	Dim A (Depth)
DOUBLE RABBET	5-3/4" THRU 12-3/4"
SINGLE RABBET	3-3/4" THRU 5-5/8"



Knocked Down (KD) frames are available with faces from 1" thru 2" when head and jamb faces are the same size. Frame face from 2-1/8" to 4" welded only. Size ranges listed above are available in 1/8" increments.

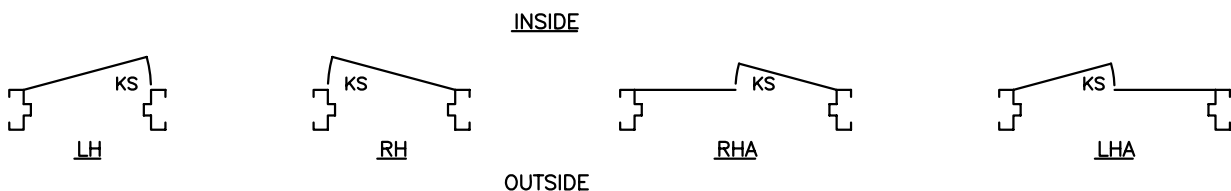

"KS" = KEY SIDE

F10-2

Hardware locations shown match Ceco standard doors.

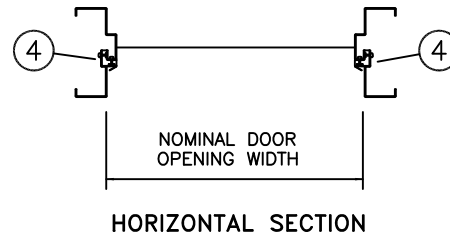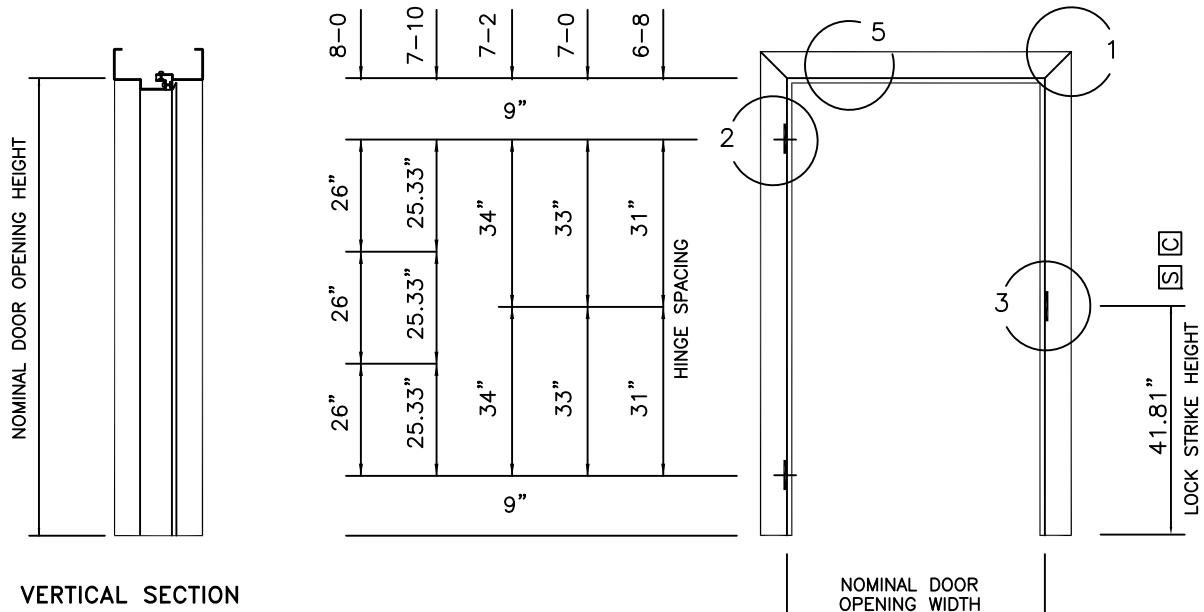


(Conversion: 1" = 25.4 mm, e.g., 1-3/4" = 44.45 mm)

JAMB ANCHOR QUANTITIES

3 PER JAMB FOR HEIGHTS UP TO 7-2 AND ONE FLOOR ANCHOR
 4 PER JAMB FOR HEIGHTS FROM 7-3 THRU 9-0 AND ONE FLOOR ANCHOR
 ONE ADDITIONAL JAMB ANCHOR FOR EACH ADDITIONAL TWO FEET IN HEIGHT OR FRACTION THEREOF
 ONE ADDITIONAL JAMB ANCHOR IN LIEU OF FLOOR ANCHOR FOR EO AND WS TYPE CONDITIONS

COATED WIRE MASONRY ANCHOR CWMA


④

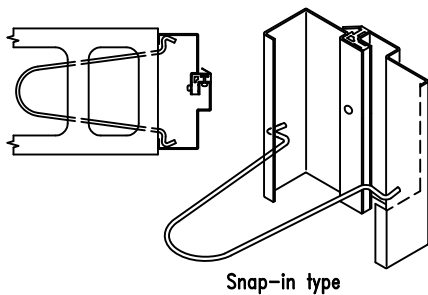

(For 2" thru 8-3/4" Depths)

EXISTING OPENING ANCHOR EO/N


④

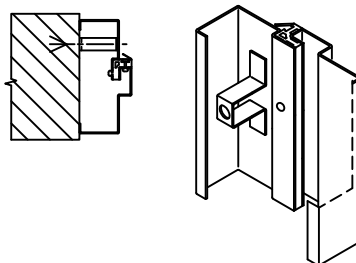

WOOD STUD FLAT STRAP ANCHOR WSFS

④

DESIGNATE WALL CONFIGURATION SO THAT PROPER POCKET CAN BE PROVIDED

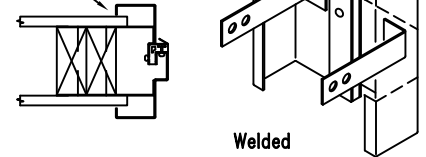

Ceco Door

ASSA ABLOY

4/15/08

