



For construction illustrations see page(s): _____.

ALL INTERSECTIONS ARE FACE WELDED AND GROUND SMOOTH.

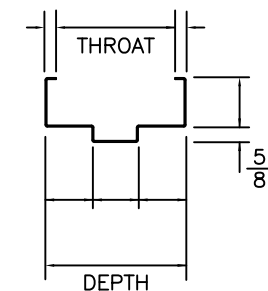

TYPICAL SECTION

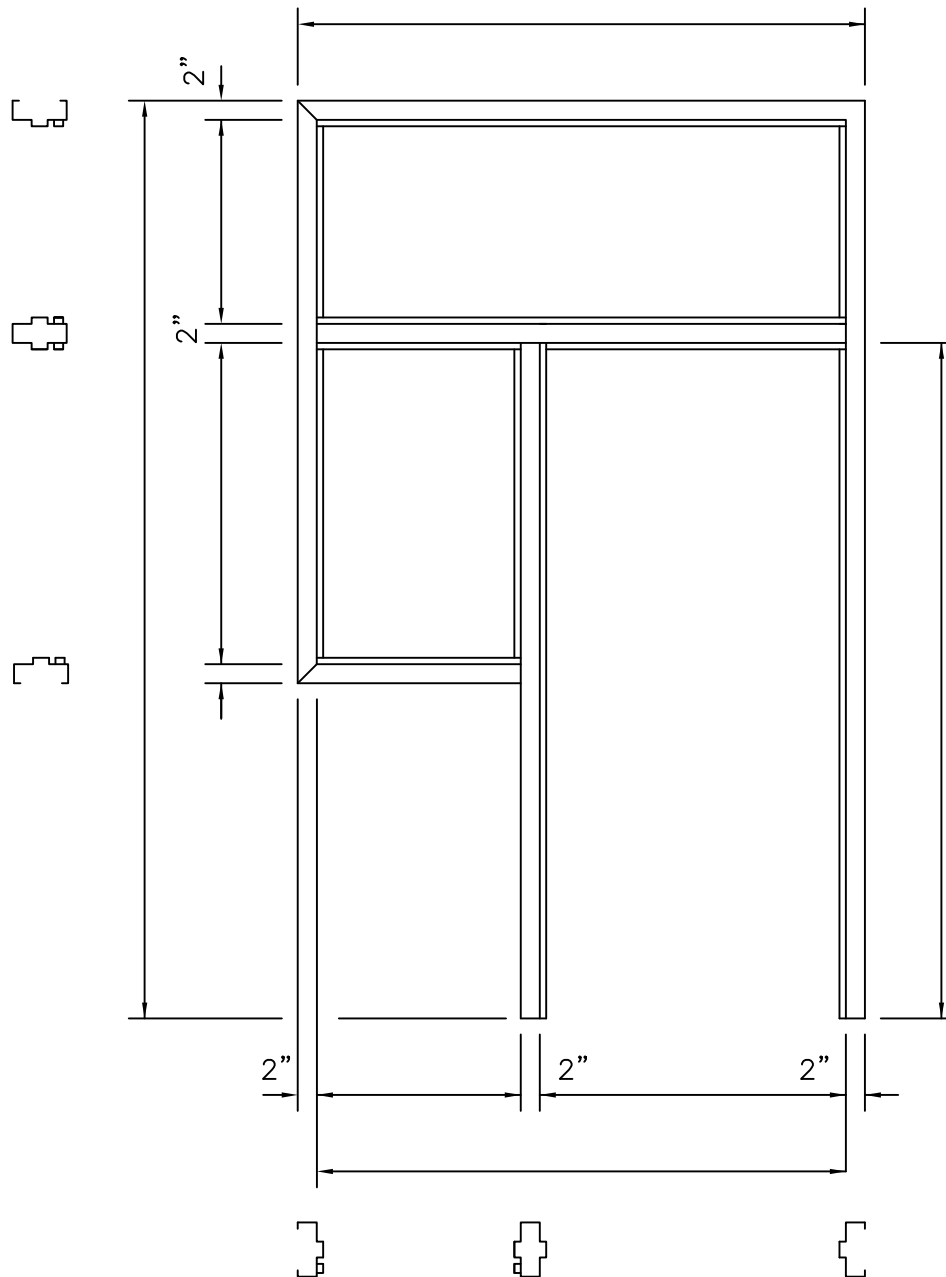

| BEAD NOTES | |
|-------------------|-------|
| .625 | .750 |
| POCKET DEPTH | _____ |
| DOOR SIDE | _____ |
| OPPOSITE DOOR | _____ |
| FRAME INFORMATION | |
| DEPTH | _____ |
| REQ'D | _____ |
| MK# | _____ |
| STRIKE | _____ |
| LOCATION | _____ |
| HINGES | _____ |
| LOCATION | _____ |
| LABEL | _____ |
| ANCHORS | _____ |
| ELEV # | _____ |



ASSA ABLOY (Conversion: 1" = 25.4 mm, e.g., 1-3/4" = 44.45 mm)

TYPE: TFLPSL MARK: _____
 REQUIRED: _____
 HAND/SWING: _____

| | | | |
|-----------------------|--------------------|---------------------------|---------------------------|
| SHT _____ OF _____ | CONTRACT NO. _____ | DRAWN BY _____ DATE _____ | CHK'D BY _____ DATE _____ |
|-----------------------|--------------------|---------------------------|---------------------------|