





PROFILES




TYPICAL SECTIONS

SERIES DQ & DU	
Dim A	DU SERIES 4-1/2" to 8-3/4"
	DQ SERIES 4-7/8" to 8-3/4"

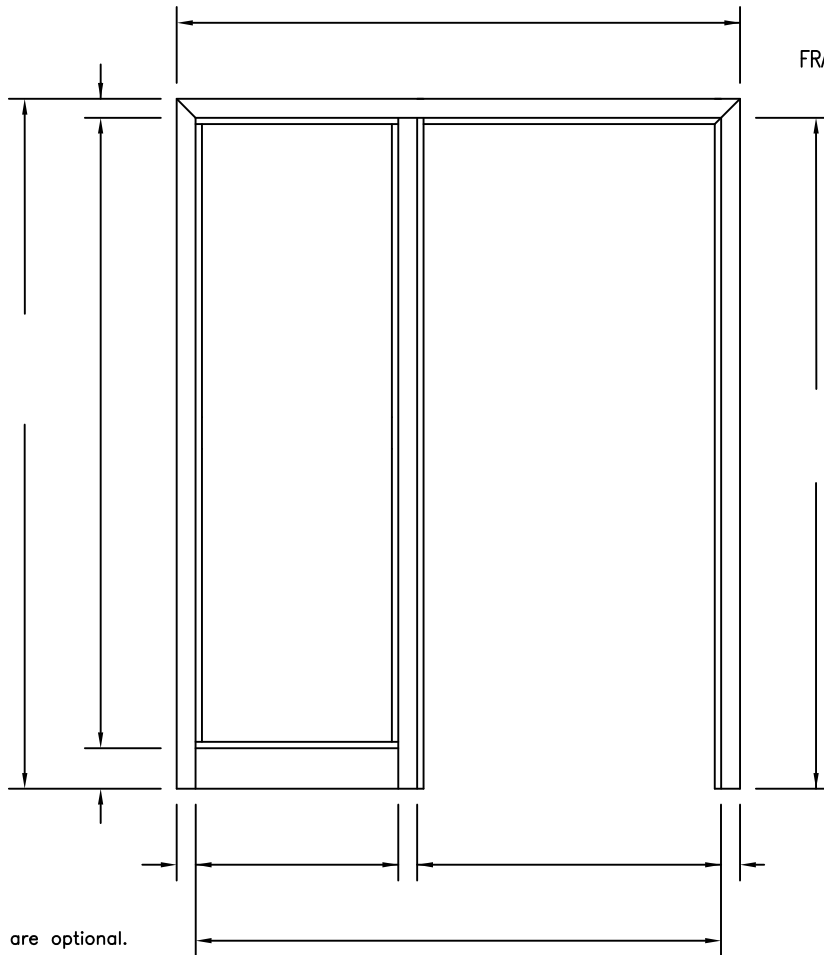


ADJUSTABLE PLUMB ANCHOR




ONE EACH JAMB
Adjust with screw driver

STANDARD SILL ANCHOR



DIMPLED HOLE FOR # 8 FH FASTENER. FASTENER IS BY CONTRACTOR AND SHOULD BE LONG ENOUGH TO ENGAGE STUD.

OPTIONAL SILL STRAP ANCHOR



(REQ'D FOR 1-1/2" & 1-3/4"FACE)

FASTENER IS BY CONTRACTOR AND SHOULD ENGAGE STUD.

Cold rolled steel is standard. Galvannealed & galvanized steel are optional.

NON-FIRE RATING ONLY

CecoDoor (Conversion: 1" = 25.4 mm, e.g., 1-3/4" = 44.45 mm)

ASSA ABLOY

SERIES DQ & DU DRYWALL FRAMES
(SLIP-ON DRYWALL SIDELIGHT FRAME)

SHT _____ OF _____	CONTRACT NO. _____	DRAWN BY _____ DATE _____	CHK'D BY _____ DATE _____
--------------------	--------------------	---------------------------	---------------------------

ELEVATION _____

QTY _____

SERIES/DEPTH _____

CORNER CONDITION KD

HAND _____

BEAD SIDE DOOR OPPOSITE DOOR

POCKET DEPTH _____

STRIKE _____

LOCN. _____

HINGES _____

LOCN. _____

ANCHORS _____

MARK# _____

FOR HAND & SWING
SEE DOOR SCHEDULE

