

LABELING AGENCIES

UL LLC
 Warnock Hersey
 Factory Mutual
FIRE TESTS
 NFPA 252, UL10B, UL10C
 & UL1754
 See Tech Data Manual for
 additional information.

Cold rolled steel is standard.
 Galvannealed and galvanized steel is optional.

FIRE LABEL

- UL WH FM NONE

JAMB ANCHORS

- MT WMA
 YS
 WSZS1 (STUD SIZE _____)
 WSZS2 (STUD SIZE _____)
 MSZ1 MSZ2
 EO/PIPE & PLATE
 EO/N

HINGE PREP

- 4-1/2" x .134" 4-1/2" x 180" 5" x .146" 5" x .190"

HANDING

- LR2 (Shown) STANDARD RR2 (Not shown)

CLOSER REINFORCEMENT

- S1 S2 S3 S4 OTHER

COMMENTS

NOTE: THE NOMINAL DOOR OPENING WIDTH DIMENSION USED FOR ORDERING IS AN ARCHITECTURAL DIMENSION. ACTUAL MANUFACTURING DIMENSION IS 3/16" LESS THAN THE NOMINAL DIMENSION TO ACCOMMODATE CECO STANDARD DOOR LEAF WIDTH SIZES.

SE2 & BE2 DOUBLE EGRESS FRAME with Type 2 Head and Jamb (1-3/8" Face)

CecoDoor (Conversion: 1" = 25.4 mm, e.g., 1-3/4" = 44.45 mm)

ASSA ABLOY

DRAWN BY _____ DATE _____		ISSUE DATE	REVISIONS	BY
CHK'D BY _____ DATE _____				
SHT _____ OF _____	CONTRACT NO. _____			

STANDARD HINGE SPACING

OPENING HEIGHT ▶	6'8"			7'0"			7'2"			7'10"			8'0"			9'0"			10'0"		
	DIMENSION ▶	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	C	D	E		
1 3/4" DOOR SPACING ▶	9"	(2) AT 31"	9"	9"	(2) AT 33"	9"	9"	(2) AT 34"	9"	9"	(3) AT 25.33"	9"	9"	(3) AT 26"	9"	9"	(3) AT 30"	9"	9"	(3) AT 34"	9"

Unless otherwise indicated, frames are for 1-3/4" thick doors.
 For SI conversion: 1" = 25.4 mm.


STANDARD FRAMES HAVE THE FOLLOWING HINGE PREP QUANTITY:

7'-6" HIGH OR SMALLER: (3) HINGE PREPS HIGHER THAN 7'-6": (4) HINGE PREPS




WELDED CORNERS:

TYPE:
 V2 OR T2 = FACE WELD ONLY
 V3 OR T3 = FULL FACE & WEB WELD

Frames with welded corners have temporary spreaders tackwelded at sill.



KNOCKED DOWN

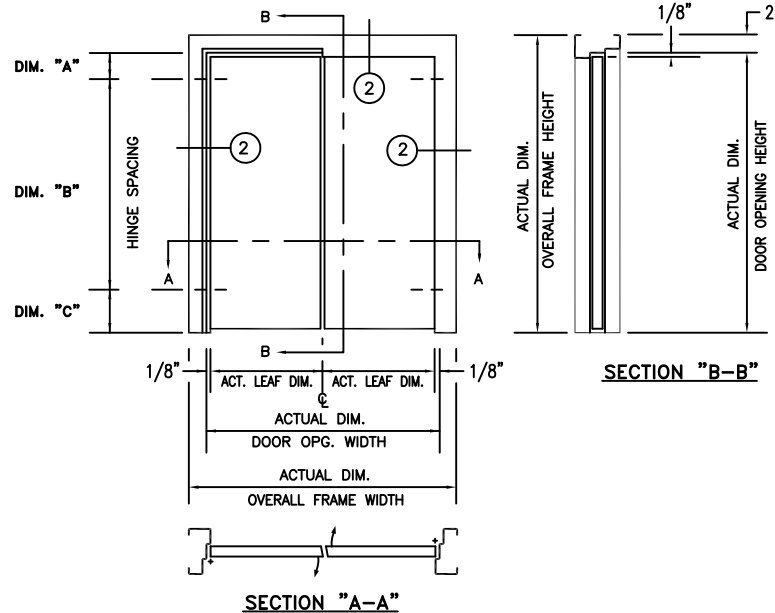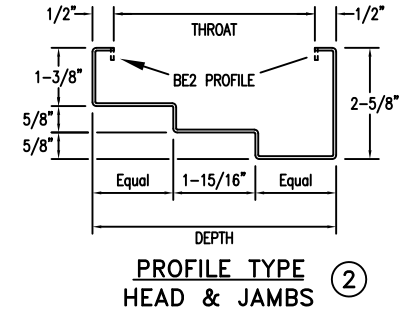

ELEVATION _____

HINGE PREPARATION

ANSI A156.7
 TEMPLATE.
 7 GAGE STEEL
 REINFORCEMENT.
 PLASTER GUARD IS
 26 GAGE STEEL.
 BACKSET: 5/16"

