


LABELING AGENCIES
 UL LLC
 Warnock Hersey
 Factory Mutual
FIRE TESTS
 NFPA 252, UL10B, UL10C,
 & UL1784
 See Tech Data Manual for
 additional information.

**CORNER
 TYPE 2**

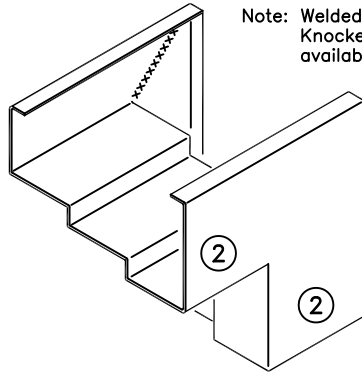

Note: Welded Corners shown.
 Knocked-Down also
 available.

Cold rolled steel is standard.
 Galvannealed and galvanized steel are optional.

FRAME & DOOR REQUIREMENTS

LABEL

- UL FM WH NONE

ANCHORS

- MT WM MS WS (STUD SIZE _____)

- YS EO

FIRE EXIT HARDWARE

COMPANY _____ **SURFACE APPLIED** **CONCEALED**

- OTHER (FOR NON-LABELED OPENINGS ONLY) _____
 TEMPLATE NO. _____

HINGE PREP

- 4-1/2" x .134" 4-1/2" x 180" 5" x .146" 5" x .190"

HANDING

- LR2 (Shown) STANDARD RR2 (Not shown) SPECIAL

CLOSER REINFORCEMENT

- S1 S2 S3 OTHER

COMMENTS

NOTE: THE NOMINAL DOOR OPENING WIDTH DIMENSION USED FOR ORDERING IS A CATALOG DIMENSION. ACTUAL MANUFACTURING DIMENSION IS 3/16" LESS THAN THE NOMINAL DIMENSION TO ACCOMMODATE CECO STANDARD DOOR LEAF WIDTH SIZES.

**DOUBLE EGRESS FRAME
 with Type 2 Head and Jamb
 (2" Face)**


CecoDoor (Conversion: 1" = 25.4 mm, e.g., 1-3/4" = 44.45 mm)

ASSA ABLOY


DRAWN BY _____		DATE _____			
CHK'D BY _____		DATE _____			
SHT _____	CONTRACT NO. _____		ISSUE DATE _____	REVISIONS _____	BY _____
OF _____					

FRAME


DEPTH _____ ELEVATION _____
 REQ'D _____
 MARK _____

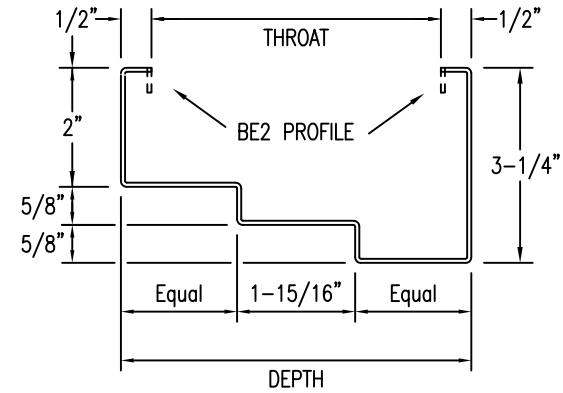

**PROFILE TYPE ②
 HEAD & JAMBS**

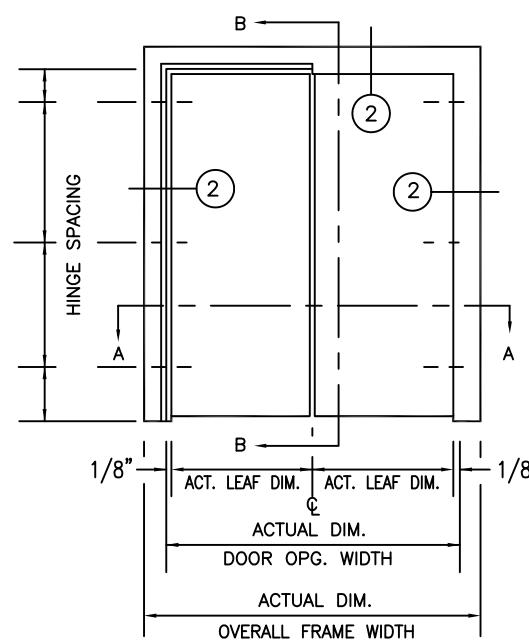

SECTION "A-A"

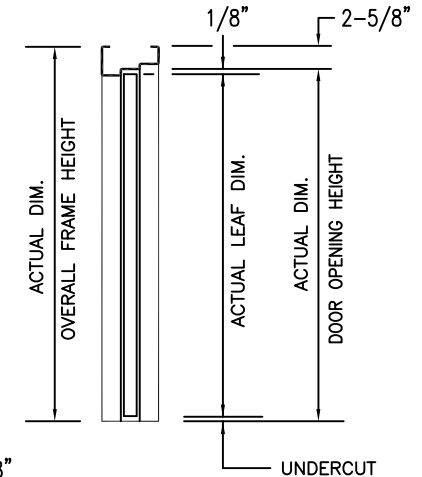

SECTION "B-B"

See sheet # _____ for
 door construction