


Acoustical Perimeter Seals

Adhesive vs Compression

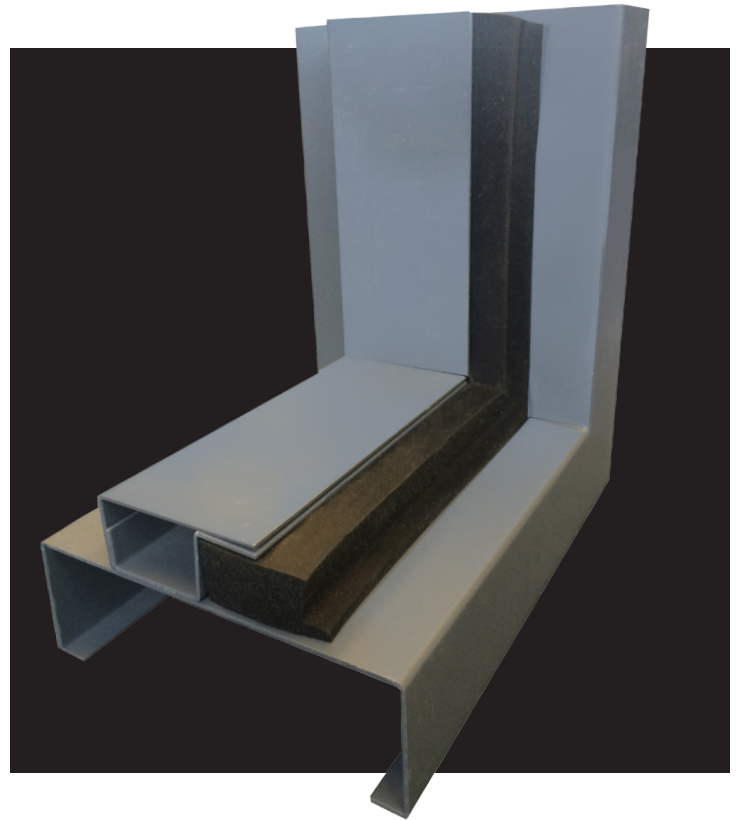

Adhesive Seals

- Achieves up to STC 52 - 1-3/4" thick doors (STC 55 - 2-1/2" thick)
- Limited field adjustability after application
- Standard frame can be utilized
- Seal modification (or reapplication) is sometimes needed in the field to accommodate certain hardware (electric strikes)
- Easy to install
- GreenGuard certified

Compression Seals

- Achieves up to STC 54 - 1-3/4" thick doors (STC 66 communicating door)
- Adjustability to accommodate field conditions
- Requires custom acoustical frame
- Meets ADA requirements
- Matches competition on high end STC assemblies
- Requires higher level of installation knowledge