


StormPro 361 Assembly Anchoring - Single


Head Anchoring Method – Welded Pipe Spacer with 3/8" Powers Lok Bolt AS

Jamb Anchoring Method – Welded Pipe Spacer with 3/8" Powers Lok Bolt AS


Design Pressure +/- 284 psf

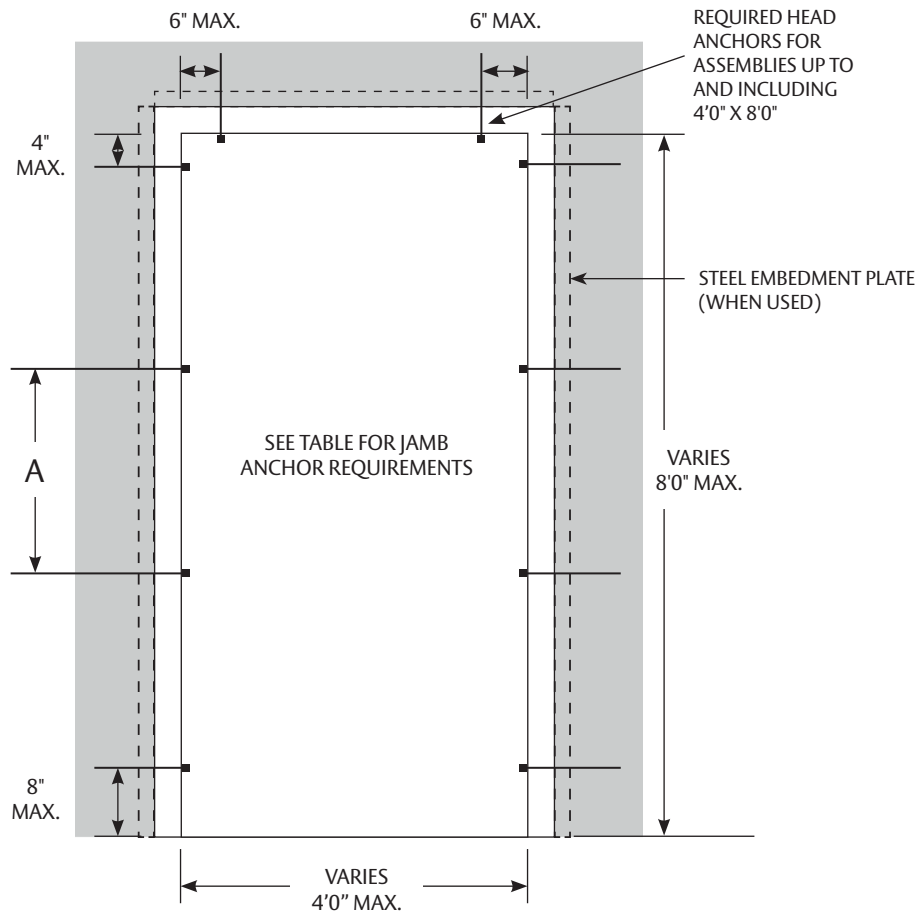

HEAD

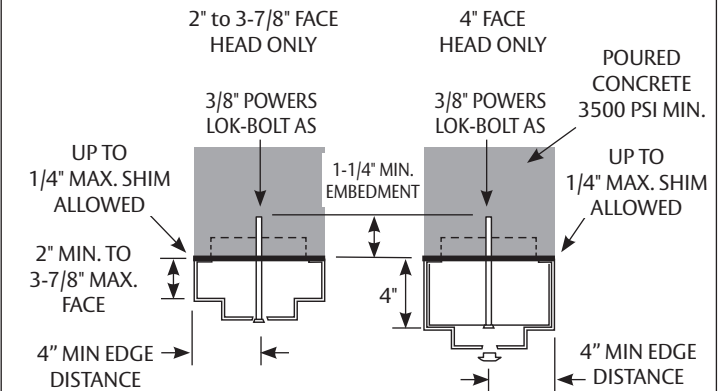

JAMB

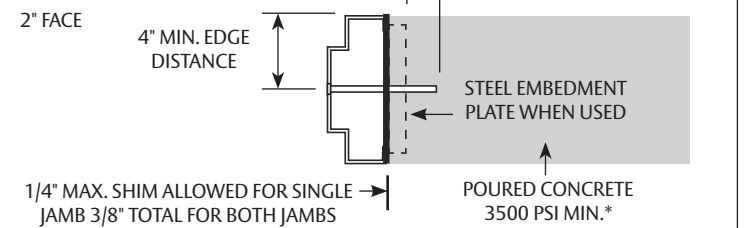

OPENING SIZE	"A" DIMENSION
UP TO AND INCLUDING 3070	21" MAX. ON CENTER
OVER 3070 AND UP TO AND INCLUDING 4080	18" MAX. ON CENTER

Jamb anchor locations may vary provided that the spacing on either side of each jamb anchor does not exceed dimension "A" in table above, distance from bottom corners does not exceed 8", and distance from top corners does not exceed 4". Head anchors shall be provided as shown. Anchors may have up to 1/4" maximum load bearing shim.

Signed and sealed anchor calculations available upon request.

Ceco Door

ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

JOB NO.

PROJECT

SHEET NO. OF

LOCATION