



High Definition 1-Panel Embossed Doors

Ideal for Hotels and Office Buildings

The Ceco HD 1-Panel Door features a distinct high definition embossed design. This design makes a grand impression and adds elegance and sophistication to any room or entrance. Underneath the exterior skins is an energy efficient polyurethane core making this door an important solution to today's building requirements. Design, durability, and energy efficiency makes the Ceco HD 1-panel door a cost effective alternative to stile and rail wood doors.

Applications

Perfect for Condominiums, Assisted living complexes, Multi-family entrances, Hotels, Office buildings, and Dormitory complexes.

Features

- 18 gage galvanized face sheets
- 2868, 2870, 3068, and 3070 available sizes
- WH & UL fire ratings up to 3 hours
- ADA compliant designs available

To learn more about HD 1-Panel Doors please call 888-232-6366 or visit www.cecodoor.com.

ASSA ABLOY, the global leader in door opening solutions




Energy Efficient




Ceco uses environmentally-sound practices in the manufacturing and shipping of our hollow metal doors and frames. Let us help as you strive to design "Green" buildings that are safe, secure and aesthetically-pleasing.

HD1-Panel

High Definition 1-Panel Embossed Doors

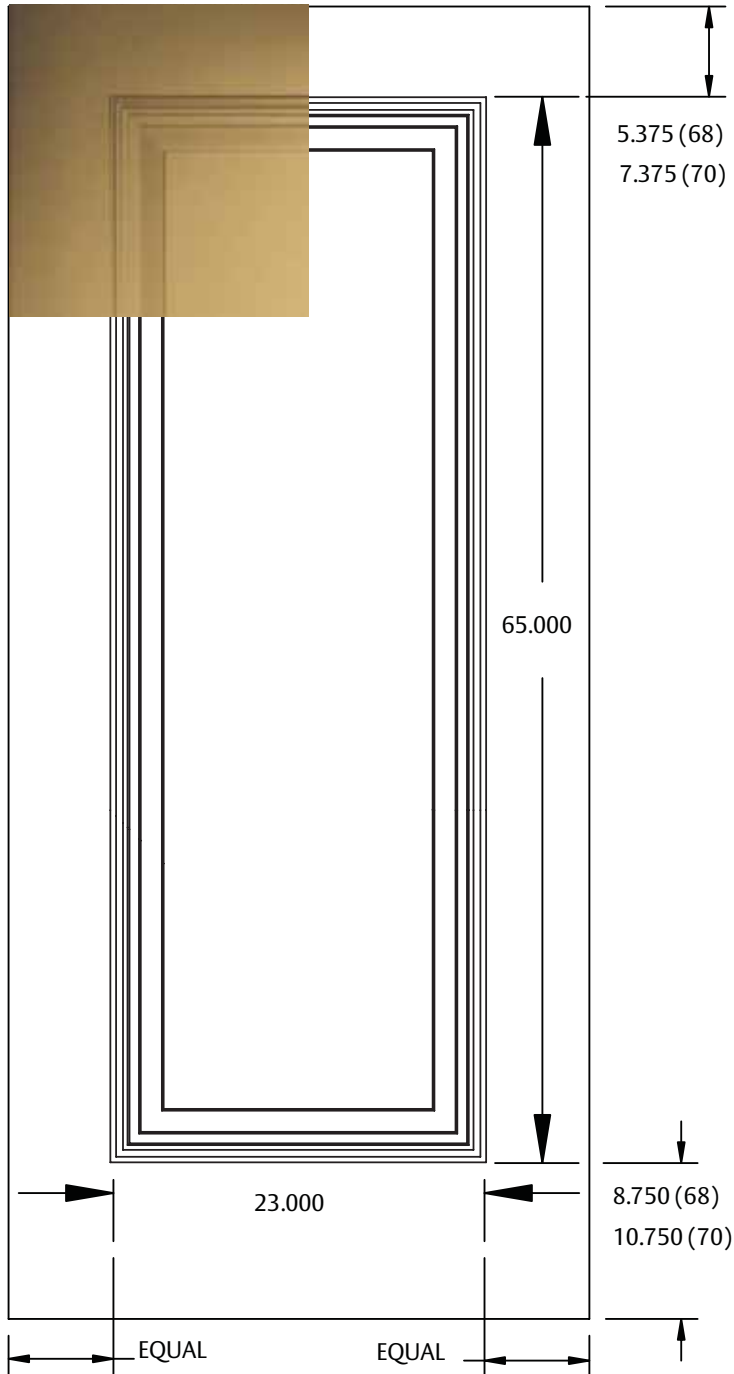

High Definition 1-Panel Embossed Design

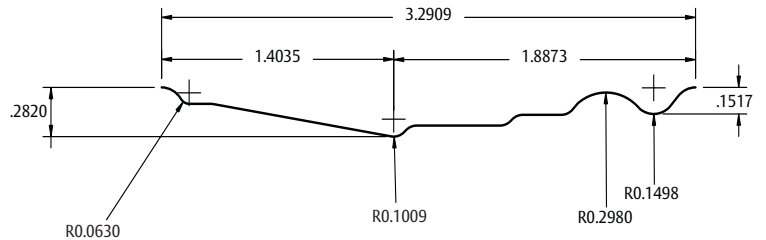

Other Features & Options

- Energy efficient foamed in place polyurethane core provides total surface support, impact resistance and exceptional thermal resistance.
- Handed and non-handed doors available.
- Reinforcing for most common lock preps including concealed hardware.
- Standard 7 gage steel hinge reinforcements
- Mechanically interlocked seamed edges are standard with optional seamless edges.
- Available with the preassembled ReadySet® System.
- ElectroLynx® pre-wired quick connect cable options available.
- Choose from over 1,900 available Colorstyle™ finish paint colors.

Performance

- Thermal Insulation: Polyurethane core values U-Factor 0.09, R-Value 11.0 (ASTM C518).
- Physical endurance testing: Meets ANSI A250.4 performance test, level A (1,000,000 cycles).
- Fire rating: Up to and including 3 hours 3'0" x 7'0" singles and 6'0" x 7'0" pairs (UL10C) UL & WH agencies.

Ceco Door
9159 Telecom Drive • Milan, TN 38358
Tel (888) 232-6366 • Fax (888) 232-6462
archhelp@cecodoor.com
www.cecodoor.com

Copyright © 2009, ASSA ABLOY Door Group, LLC,
an ASSA ABLOY Group company. All rights reserved.



ASSA ABLOY, the global leader
in door opening solutions